


Crossride INT e500 Touring

GLOSS RADIOACTIVE YELLOW/BLACK

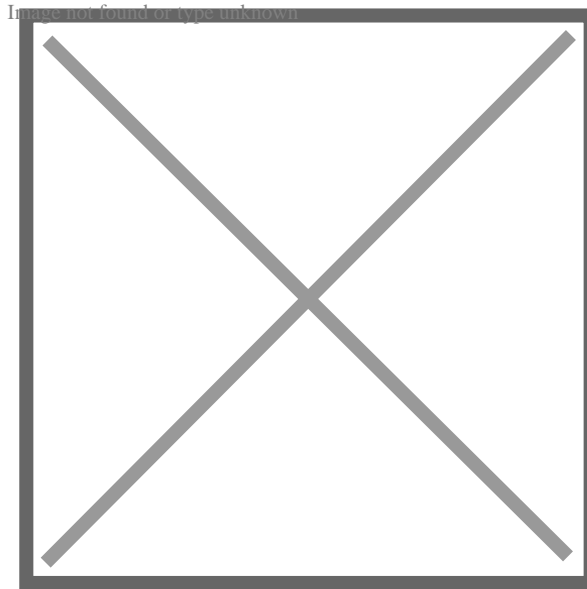

E-TOUR

E-BIKE

E-BIKE SYSTEM	SHIMANO STEPS EP8 - Middle Drive Unit
MOTOR	SHIMANO STEPS EP800, 36V, 250W, 85Nm
BATERRIE	DARFON, 504 Wh, in-frame mount
ANZEIGE	SHIMANO SC-E5003, Clamp band
CHARGER	DARFON 4A Smart plus charger, charging time up to 4,5 hours
MAX SUPPORT SPEED	25 km/h
AKKULEBENSDAUER	1000/60% of original capacity
DISTANCE RANGE	120 km (ECO mode) w/EP8 range 20% up
FRAMESET	
COLOUR	Gloss Radioactive Yellow/Black
RAHMEN	Alloy Al-6061 T6 Custom MONO tubing, Smooth Welding, Cross Fun Geometry, Unisex 29er, SHIMANO STEPS DU hanger, 2nd Gen. Battery Integration, OLD 135x9, Disc Brake Post Mount, Fender&Kickstand Ready Dropout, Replaceable RD Hanger, Inner Cable Routing
STEUERSATZ	ACROS AZX-251, Zero Stack, 1-1/8", BlockLock
GABEL	SR Suntour NVX30 NLO, 1-1/8", Coil, QR Type, Lockout, 80mm travel
RAHMEN-GRÖSSE	15.0"(S), 17.0"(M), 19.0"(L), 21" (XL)
DRIVETRAIN	
SCHALTUNG	1x10
SCHALTHEBEL	SHIMANO DEORE SL-M4100-IR, 10-speed
SCHALTWERK	SHIMANO DEORE RD-M5120 Shadow Plus
KETTENRADGARNITUR	SHIMANO FC-EM600, 38T
CASSETTE	SHIMANO DEORE CS-M4100-10, 11-46T
KETTE	KMC X10e EPT
PEDALE	Marwi SP-827 SANDBLOCK Non/slip pedal
COMPONENTS	
LENKER	ONE1 Alloy, MTB AL-325BT, 6° upsweep, 9° backsweep, 25mm rise, 720mm, 31.8mm
VORBAU	ONE1 Sport MAS-D61808 Alloy, 31.8xE65mm, ±15°
GRIFFE	Velo VLG-1879D2, Ergo Grip
BREMSEN	SHIMANO BL-M4100/BR-MT420, 180/180 rotor, hydraulic disc brake, metallic pads
SATTEL	Selle Royal Ariel
SATTELSTÜTZE	ONE1 Alloy, SP C207, 30.9x350mm

WHEELS

NABE VR	SHIMANO TX HB-TX505, 32H, CENTER LOCK, QR Type
NABE HR	SHIMANO TX FH-TX505-8, 32H, CENTER LOCK, M10x135mm, QR Type
FELGEN	WTB SX19, 32H
REIFEN	WTB Riddler Comp, 29x1.75", Reflective Tape
SPEICHEN	Sapim Leader, Stainless Black

ACCESSORIES

LICHT VORNE	AXA Compactline 20
LICHT HINTEN	Spanninga Pling

WEIGHT

24.4 Kg (M size)

GEOMETRY

FRAME SIZE	17.0" (M)	19.0" (L)	21.0" (XL)
WHEEL SIZE	29"	29"	29"
SEAT TUBE LENGTH (MM)	432	473	533
SEAT TUBE ANGLE (DEGREE)	74.5	74.5	74.5
EFFECTIVE TOP TUBE LENGTH (MM)	615	645	670
REACH (MM)	449	468	489
STACK HEIGHT (MM)	612	612	630
HEAD TUBE LENGTH (MM)	160	160	180
HEAD TUBE ANGLE (DEGREE)	68	68	68
CHAINSTAY LENGTH (MM)	465	465	465
BB DROP (MM)	35	35	35
WHEELBASE (MM)	1191	1215	1244
HANDLEBAR WIDTH (MM)	700 - R25	700 - R25	700 - R25
STEM LENGTH (MM)	65	65	65
CRANK LENGTH (MM)	170	170	170
SEAT POST LENGTH (MM)	350	350	350

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country.