


Gravelride INT e700 Di2

GLOSS LIGHT SLATE/BLACK/SILVER

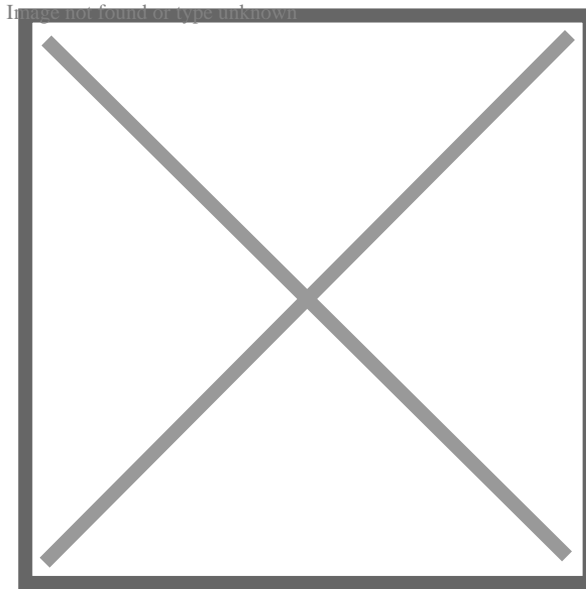

E-TOUR

E-BIKE

E-BIKE SYSTEM	SHIMANO STEPS EP8 - Middle Drive Unit
MOTOR	SHIMANO STEPS EP800, 36V, 250W, 85Nm
BATERIE	DARFON, 504 Wh, in-frame mount
ANZEIGE	SHIMANO SC-EM800, Clamp band
CHARGER	DARFON 4A Smart plus charger, charging time up to 4,5 hours

MAX SUPPORT SPEED	25 km/h
AKKULEBENSDAUER	1000/60% of original capacity
DISTANCE RANGE	120 km (ECO mode) w/EP8 range 20% up

FRAMESET

COLOUR	Gloss Light Slate/Black/Silver
RAHMEN	Alloy Al-6061 T6 Custom tubing, Smooth Welding, Gravel Fun Geometry, Shark Spine EVO 29er, SHIMANO STEPS DU hanger, 2nd Gen. Battery Integration, OLD 135x9, Disc Brake Post Mount, Fender&Kickstand Ready Dropout, Replaceable RD Hanger, Inner Cable Routing
STEUERSATZ	ACROS AZX-251, Zero Stack, 1-1/8"x1.5", BlockLock
GABEL	SR Suntour GX32-S LOR, Fender&Carrier Ready, 1-1/8-1.5", Flat Mount, 100x12 Thru Axle, Lockout, 50 mm travel
RAHMEN-GRÖSSE	18.0"(M), 20.0"(L), 22.0"(XL)

DRIVETRAIN

SCHALTUNG	1x11
SCHALTHEBEL	SHIMANO GRX ST-RX815, Di2 11-speed
SCHALTWERK	SHIMANO GRX RD-RX815 Di2 Shadow Plus
KETTENRADGARNITUR	SHIMANO FC-EM600, 44T
CASSETE	SHIMANO CS-M7000-11, 11-42T
KETTE	KMC X11eT Turbo Power
PEDALE	Marwi SP-827 SANDBLOCK Non/slip pedal

COMPONENTS

LENKER	ONE1 Compact, 420mm, 31.8mm
VORBAU	ONE1 TDS-RD507 Alloy, 31.8xE50mm, ±7°
GRIFFE	Velo VL-T5079HD2R, anti-slip, reflective
BREMSEN	SHIMANO GRX BR-RX810, 180/160 rotor, hydraulic disc brake
SATTEL	WTB SL8 Comp
SATTELSTÜTZE	KIND SHOCK, RAGE-i, dropper post 100mm travel, 30.9x342mm

WHEELS

NABE VR	SHIMANO TIAGRA HB-RS470, 32H, CENTER LOCK, 12x100mm THRU Type AXLE
NABE HR	SHIMANO TIAGRA FH-RS470, 32H, CENTER LOCK, 12x142mm THRU Type AXLE
FELGEN	WTB ST i23, 32H
REIFEN	WTB Venture TCS Light/Fast Rolling Tan Wall, 700x50C
SPEICHEN	Sapim Leader, Stainless Black

WEIGHT

19.9 Kg (L size)

GEOMETRY

FRAME SIZE	18.0" (M)	20.0" (L)	22.0" (XL)
WHEEL SIZE	29"	29"	29"
SEAT TUBE LENGTH (MM)	457	508	559
SEAT TUBE ANGLE (DEGREE)	75	75	75
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620
REACH (MM)	412	432	447
STACK HEIGHT (MM)	628	628	642
HEAD TUBE LENGTH (MM)	160	160	180
HEAD TUBE ANGLE (DEGREE)	69	69	69
CHAINSTAY LENGTH (MM)	468	468	468
BB DROP (MM)	65	65	65
WHEELBASE (MM)	1137	1157	1180
HANDLEBAR WIDTH (MM)	480 (top 400)	500 (top 420)	500 (top 420)
STEM LENGTH (MM)	50	50	50
CRANK LENGTH (MM)	175	175	175
SEAT POST LENGTH (MM)	L342 - T100 / 350	L342 - T100 / 350	L342 - T100 / 350

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country.